



Casing Bowl Patch

Weatherford's casing bowl patch allows permanent, leak-proof repairs to damaged casing strings without removal of the entire string from the hole. With a lead or rubber sealing element, the casing bowl patch is lowered into the hole on the end of the replacement string. Like an overshot, the patch then engages the casing remaining in the hole.

Applications


The casing bowl patch provides an economical means of repairing casing string defects caused by leaks or other damage.

Features, Advantages and Benefits

- The casing bowl patch arrives at the work site ready for installation to save rig time.
- High-grade alloy steel construction provides durability and strength.

Options

Rubber sealing elements are standard; lead sealing elements are available on request.

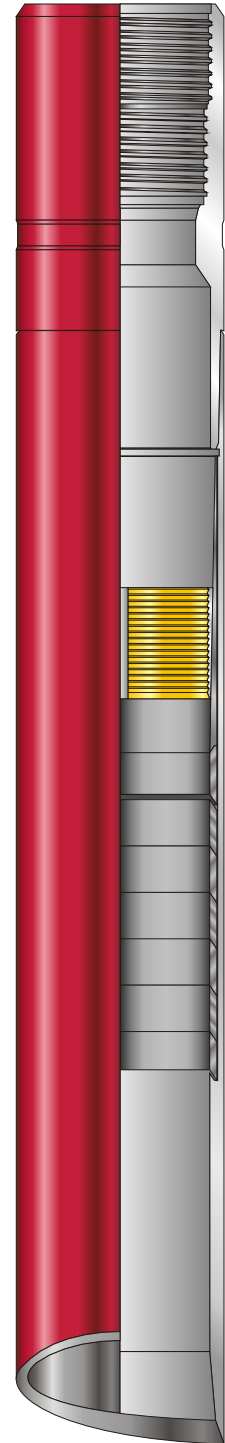



Casing Bowl Patch

Specifications

Size of Tubing or Casing to Be Patched	Casing Bowl OD		Minimum Size of Casing to Be Run Into	
			OD	Weight
(in.)	(in.)	(mm)	(in.)	(lb/ft)
2-7/8	3-7/8	98.425	4-1/2	9.5
4-1/2	5-5/8	142.875	6-5/8	24.0
5	5-15/16	150.813	7-5/8	39.0
	6-1/4	158.750		
5-1/2	6-5/8	168.275	7-5/8	29.7
	7-1/4	184.150	8-5/8	39.0
6	7-1/4	184.150	8-5/8	49.0
	8	203.200	9-5/8	53.5
6-5/8	7-5/8	193.675	8-5/8	36.0
	8-1/4	209.550	9-5/8	53.5
7	8-1/4	209.550	9-5/8	53.5
	8-7/8	225.425	10-3/4	65.7
7-5/8	9-3/8	238.125	10-3/4	60.7
	10-1/4	260.350	11-3/4	60.0
8-5/8	9-11/16	246.063	10-3/4	45.5
	10-1/4	260.350	11-3/4	60.0
9-5/8	11-1/2	292.100	13-3/8	72.0
10-3/4	12-1/8	307.975	13-3/8	72.0
11-3/4	13-3/4	349.250	16	84.0
13-3/8	14-3/4	374.650	16	84.0